

dup (POSIX) - duplicate a file descriptor

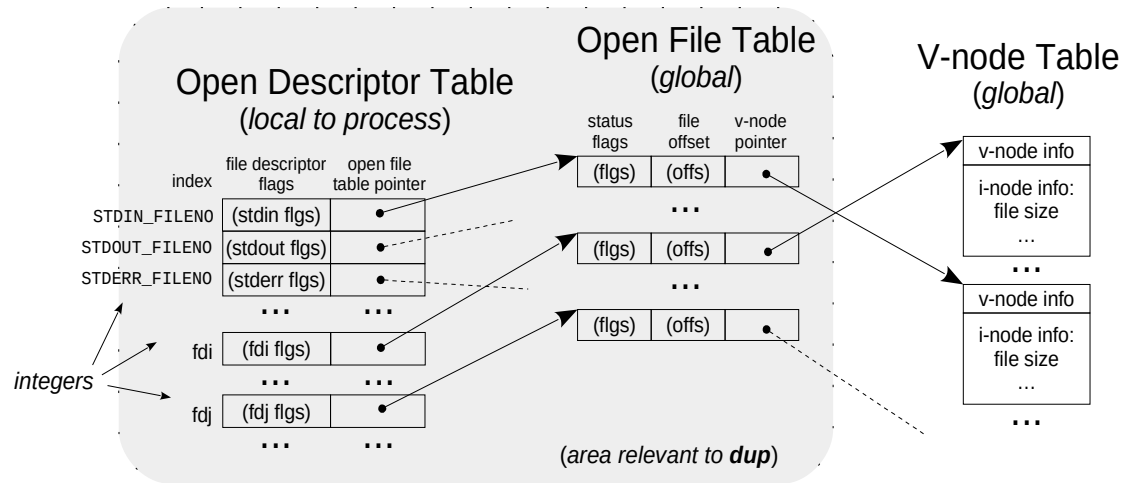



Fig. POSIX file-related system tables. In grey, zone relevant to *dup*.

Example of file descriptor flags: `FD_CLOEXEC` (currently, the only flag).

Examples of status flags: `O_APPEND`, `O_NONBLOCK`.


dup (POSIX): dup

Fig. dup's effect in file-related system tables

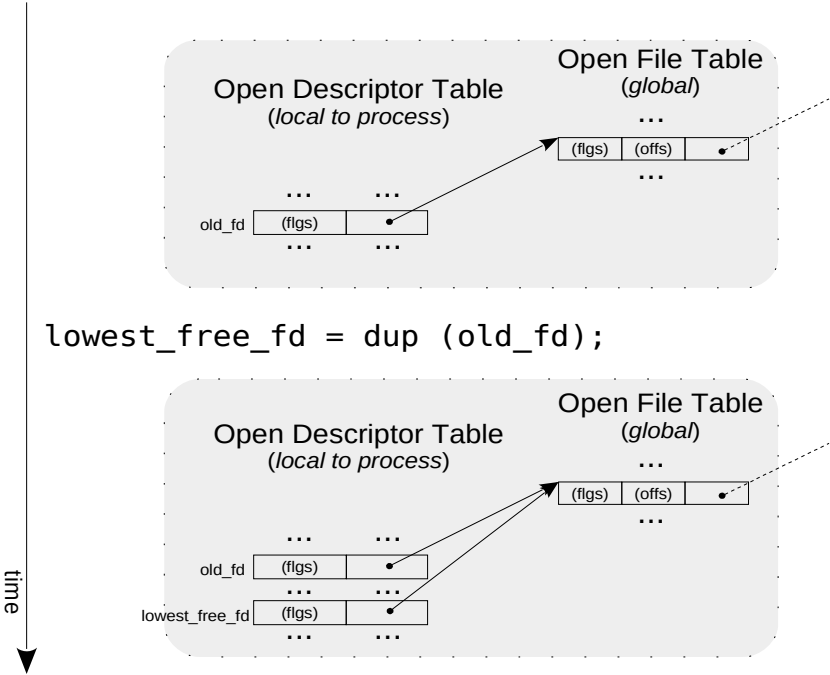

dup (POSIX): dup2

Fig. dup2's effect in file-related system tables – example 1

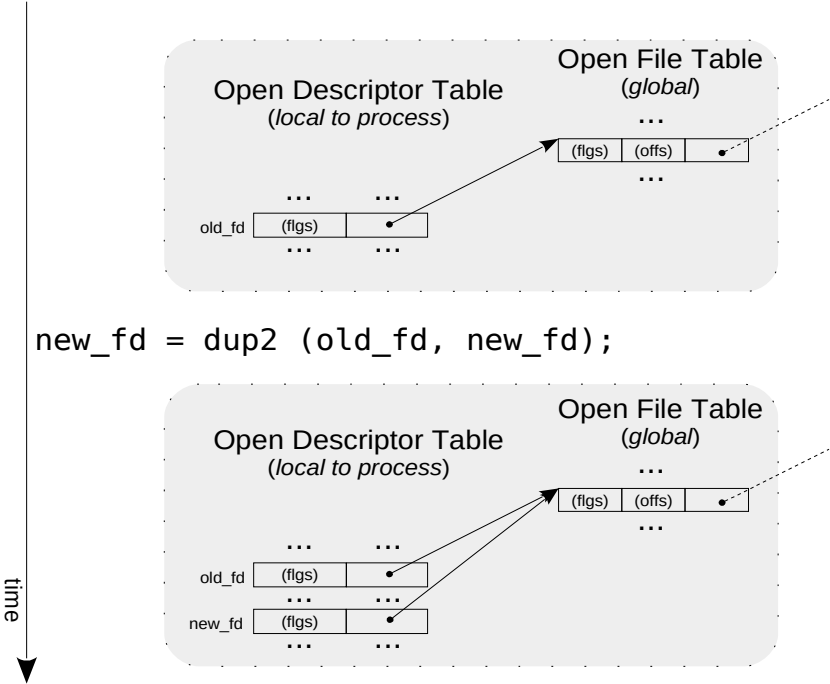

dup (POSIX): dup2

Fig. *dup2*'s effect in file-related system tables – example 2

